

Schottky Barrier Rectifier

SS315A
SMA



Cathode  Anode

Features

- Low forward voltage drop
- Low power losses
- High efficiency operation
- Lead Free Finish, RoHS Compliant

Applications

- DC/DC Converters
- AC/DC Adaptors
- Switching Power Supplies
- Freewheeling Diodes

Maximum ratings and electrical characteristics (TJ = 25°C unless otherwise noted)

Parameter			Symbol	Limit		Unit
Maximum repetitive peak reverse voltage			VRRM	150		V
Maximum average forward rectified current			IF(AV)	3		A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load			IFSM	70		A
Operating junction and storage temperature range			TJ, TSTG	-55 to +150		°C
Typical thermal resistance			RθJA	55		°C/W
Instantaneous forward voltage			VF	TYP.	MAX.	V
	IF=3A	TJ=25°C		0.88	0.95	
	IF=3A	TJ=125°C		0.82	-	
Instantaneous reverse current at rated reverse voltage		TJ=25°C	IR	1	100	uA
		TJ=125°C		5	-	mA

RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)

FIG.1: Current Derating, Case

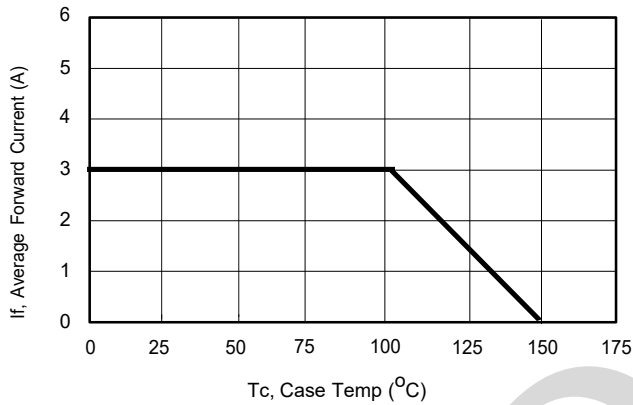


FIG.2: Maximum Repetitive Surge Current

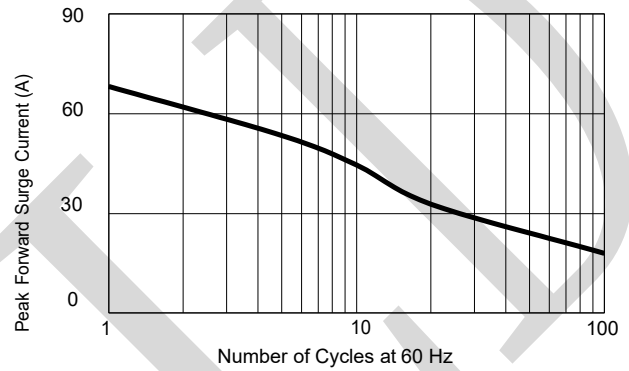


FIG.3: Typical Forward Characteristics



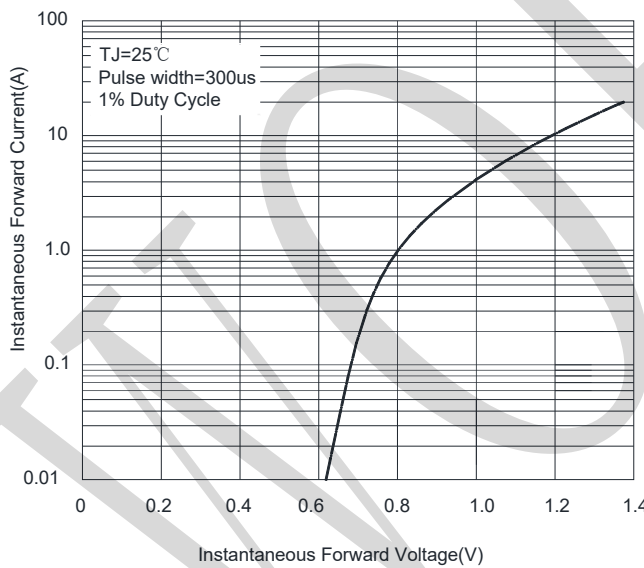


FIG.4: Typical Reverse Characteristics

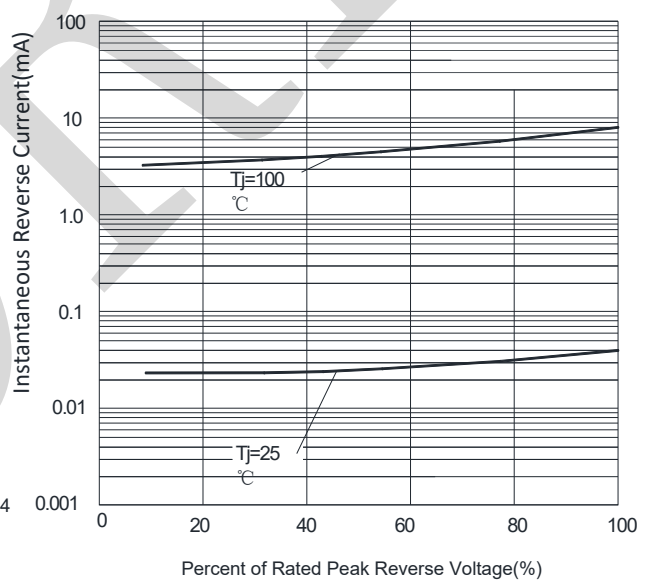

PACKAGE OUTLINE DIMENSIONS

SMA

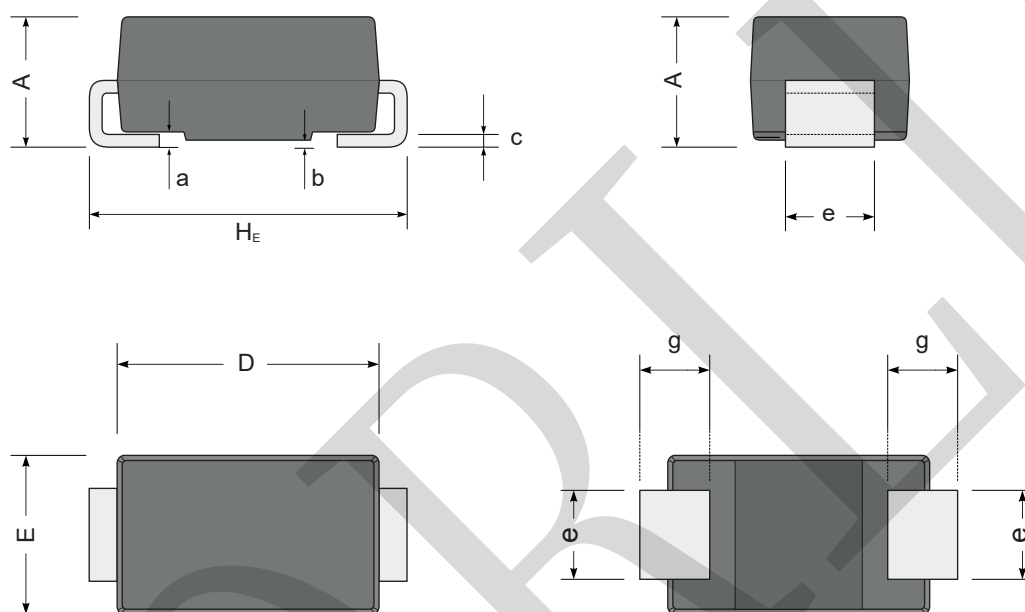

UNIT		A	D	E	H _E	c	e	g	b	a
mm	max	2.2	4.5	2.7	5.2	0.31	1.6	1.5	0.2	0.3
	min	1.9	4.0	2.3	4.7	0.15	1.3	0.9	0.05	
mil	max	87	181	106	205	12	63	59	7.9	12
	min	75	157	91	185	6	51	35	2	

Marking Information



①Product model : SS315

②PDC information:

Y X WW

WW:Week code(01 to 53)

X:Internal identification code

Y:Year code(ex:0=2020)