


Surface Mount Fast Recovery Rectifier

ES2JB

SMB



Cathode  **Anode**

Marking:ES2J

Features

- Low forward voltage drop
- Low leakage
- High current capability
- Super fast switching speed
- High forward surge capability
- High reliability.

Mechanical Data

- Epoxy: UL 94V-O rate flame retardant
- Lead: lead solderable per MIL-STD-202, method 208 guaranteed
- Polarity: Color band denotes cathode end

■Maximum Ratings (T_a=25°C Unless otherwise specified)


Parameter	Symbols	ES2JB	Units
Maximum Repetitive Peak Reverse Voltage	VRRM	600	V
Maximum RMS voltage	VRMS	420	V
Maximum DC Blocking Voltage	VDC	600	V
Maximum Average Forward Rectified Current	I(AV)	2.0	A
Reverse Recovery Time. IF=0.5A,IR=1A,IRR=0.25A	Trr	35	ns
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	IFSM	75	A
I ² t rating for fusing (1ms< t < 8.3ms)	I ² t	22.3	A ² S
Maximum Forward Voltage at 2.0A and 25°C	VF	1.5	V
Maximum DC Reverse Current @TA=25 °C at Rated DC Blocking Voltage @TA=100 °C	IR	5 100	μA
Typical Junction Capacitance (Note1)	Cj	45	pF
Operating and Storage Temperature Range	Tj, Tstg	-55 ~ +150	°C
Typical thermal resistance (Note 2)	RθJ-C	16	°C/W

Note: 1. Measured at 1MHz and applied reverse voltage of 4 VDC.

2. Thermal resistance between junction and ambient and between junction and lead mounted on P.C.B with 3mm*3mm copper pad areas.

RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)

Fig.1 Reverse Recovery Time Characteristic And Test Circuit Diagram

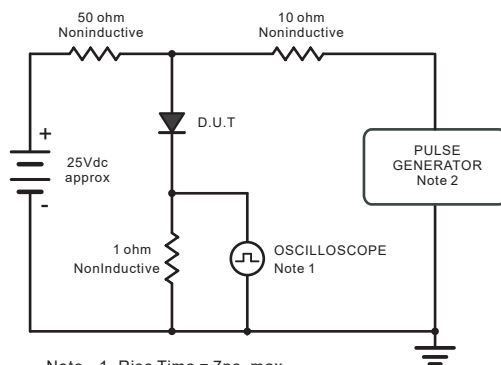

Note: 1. Rise Time = 7ns, max.
Input Impedance = 1megohm, 22pF.
2. Rise Time = 10ns, max.
Source Impedance = 50 ohms.

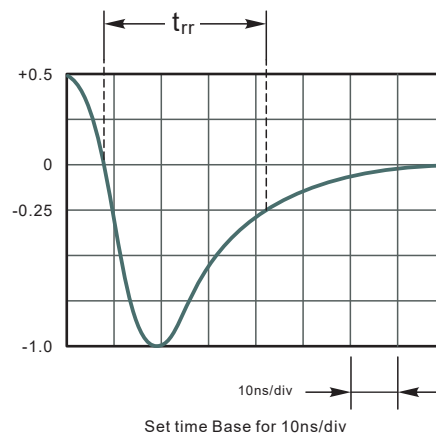


Fig.2 Maximum Average Forward Current Rating

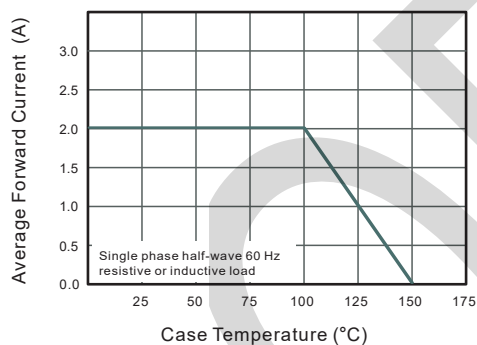


Fig.3 Typical Reverse Characteristics

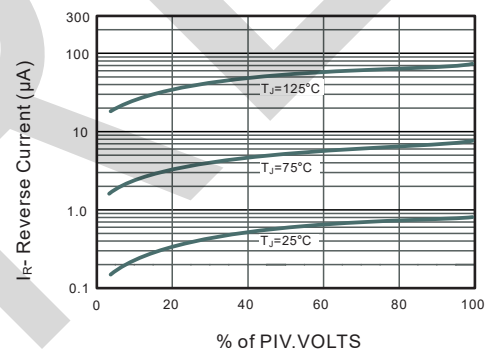


Fig.4 Typical Forward Characteristics



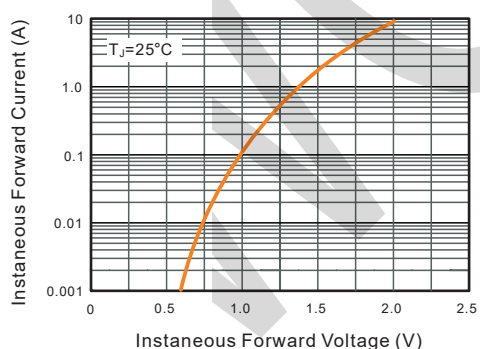


Fig.5 Typical Junction Capacitance

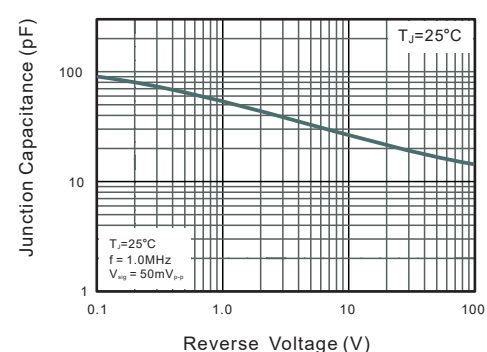

PACKAGE OUTLINE DIMENSIONS

SMB dimension definitions

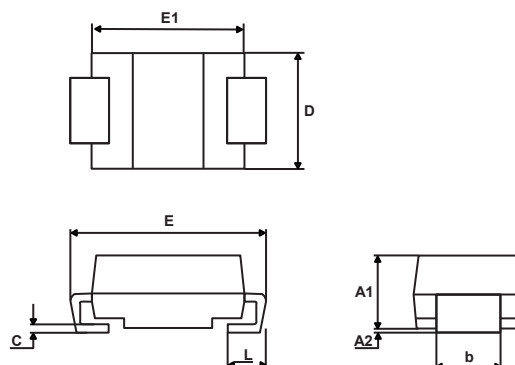

SMB dimension values

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A1	1.90	2.45	0.075	0.096
A2	0.05	0.20	0.002	0.008
b	1.95	2.20	0.077	0.087
c	0.15	0.40	0.006	0.016
D	3.30	3.95	0.130	0.156
E	5.10	5.60	0.201	0.220
E1	4.05	4.60	0.159	0.181
L	0.75	1.50	0.030	0.059