


Superfast Recovery Rectifier

MURE1060SD-S

PDFN5x6

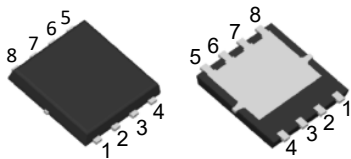

PIN5,6,7,8 ← PIN1,2,3,4

Features

- Low forward voltage drop
- Low leakage
- High current capability
- Super fast switching speed
- High forward surge capability
- High reliability.

Mechanical Data

- Epoxy: UL 94V-O rate flame retardant
- Lead: lead solderable per MIL-STD-202, method 208 guaranteed
- Polarity: Color band denotes cathode end
- Mounting position: Any
- Weight: 0.054ounce, 1.549gram

Parameter	Symbols	MURE1060SD-S	Units
Maximum Repetitive Peak Reverse Voltage	VRRM	600	V
Maximum RMS voltage	VRMS	420	V
Maximum DC Blocking Voltage	VDC	600	V
Maximum Average Forward Rectified Current	I(AV)	10.0	A
Reverse Recovery Time. IF=0.5A,IR=1A,IRR=0.25A	Trr	35	ns
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	IFSM	100	A
I ² t rating for fusing (1ms< t < 10ms)	I ² t	41.5	A ² S
Maximum Forward Voltage at 10A and 25 °C	VF	1.5	V
Maximum DC Reverse Current @TA=25 °C at Rated DC Blocking Voltage @TA=100 °C	IR	5 250	μA
Typical Junction Capacitance (Note1)	Cj	50	pF
Operating and Storage Temperature Range	Tj, Tstg	-55 ~ +150	°C
Typical thermal resistance (Note 2)	RthJC	6.0	°C/W

Note: 1. Measured at 1MHz and applied reverse voltage of 4 VDC.

2. Thermal resistance junction to case, lead and ambient in accordance with JESD-51.

Unit mounted on glass-epoxy substrate with 1oz/ft² 20x20 mm copper pad per pin with heatsink

RATINGS AND CHARACTERISTICS CURVES (TA = 25 °C unless otherwise noted)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

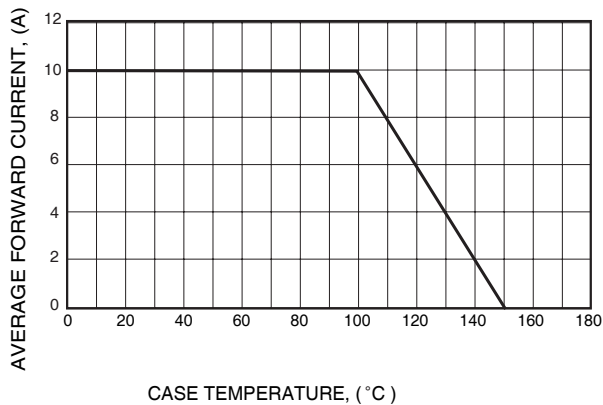


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

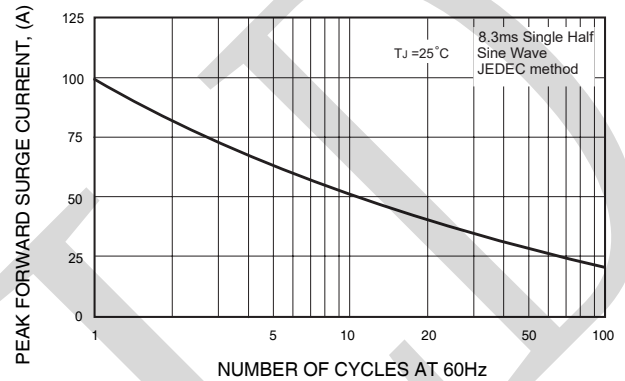


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS



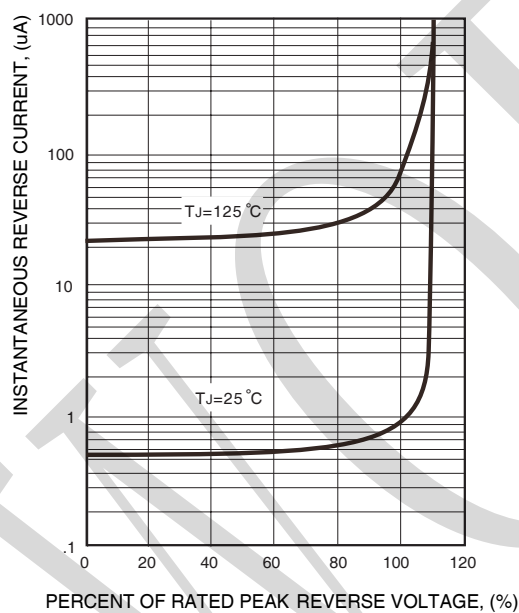


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

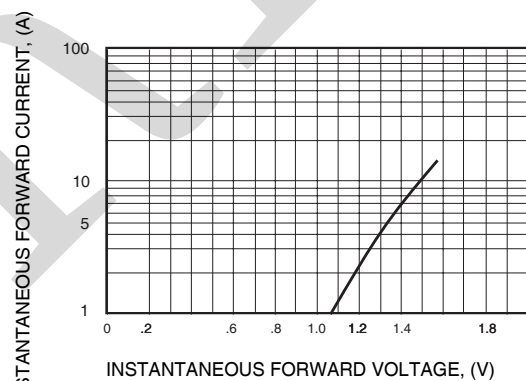

PACKAGE OUTLINE DIMENSIONS


Note:unit mm

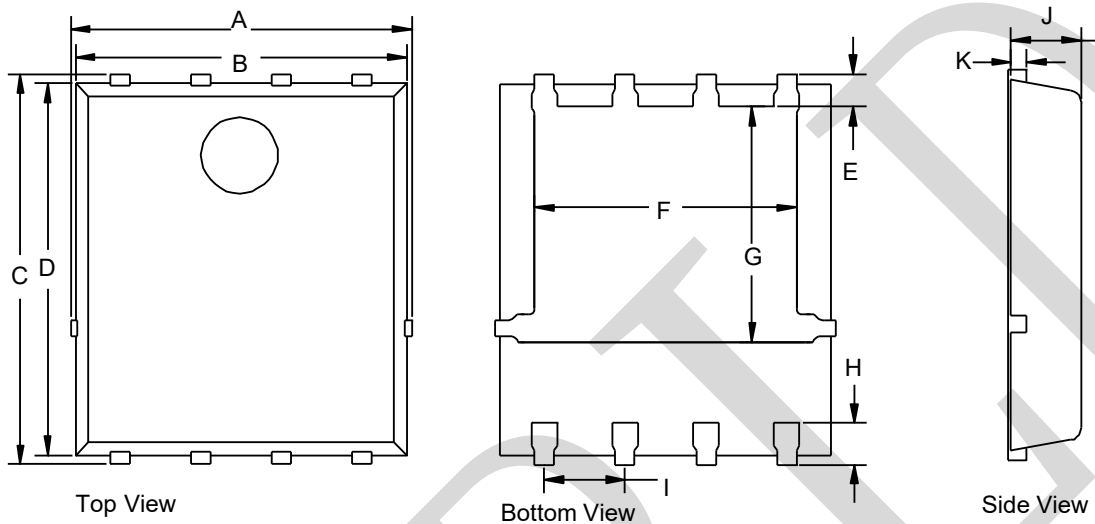

PDFN5x6 mechanical data

UNIT		A	B	C	D	E	F	G	H	I	J	K
mm	min	4.90	4.8	5.90	5.66	0.60	3.90	3.30	0.53	1.27	0.9	0.254
	max	5.55	5.4	6.35	6.06		4.32	3.92	0.76		1.2	
mil	min	192.9	188.9	232.3	222.8	23.6	153.5	129.9	20.8	50.0	35.4	10.0
	max	218.5	212.6	250.0	238.6		170.1	154.3	29.9		47.2	

PDFN5x6 Suggested Pad Layout

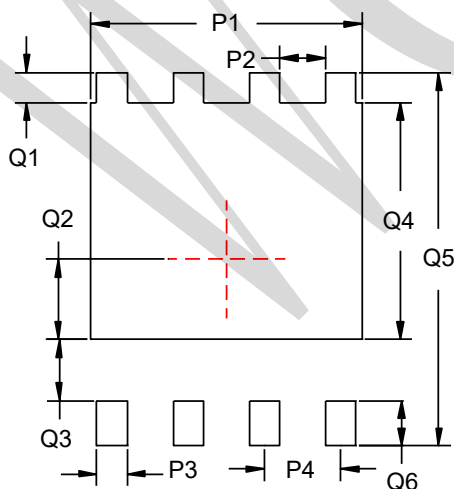

UNIT		P1	P2	P3	P4	Q1
mm	min	4.52	0.76	0.51	1.27	0.50
mil	min	177.9	29.9	20.07	50.0	20.0

UNIT		Q2	Q3	Q4	Q5	Q6
mm	min	1.34	1.02	3.97	6.25	0.76
mil	min	52.75	40.15	156.30	246.06	29.92